
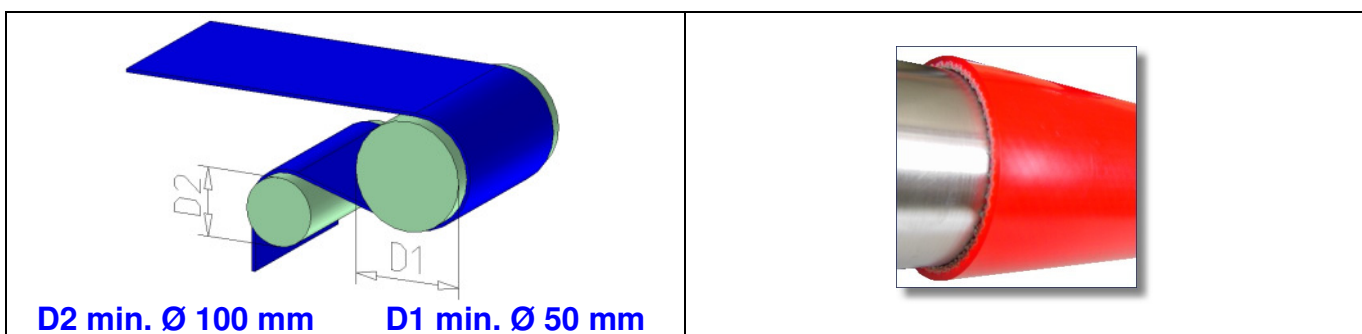


Belt:	Stanzband / die cutting belt	
Type:	TT 373105 LongLife, red	
Data sheet	19061	

CONSTRUCTION		MAIN TECHNICAL DATA		MECHANICAL DATA	
Top cover:	2,0 mm PU	Total thickness:	3.2 mm	Load of 1% extention:	16 N/mm
Colour:	red	Weight:	4.0 kg/m ²	Max. working tention:	24 N/mm
Fabric:	Polyester	Friction coeff. of steel:	0,32	Breaking load:	62 N/mm
Plies of fabric:	1	Product temp.	- 20°C to + 80°C	Hardness Shore A	85°
Backside:	fabric	Manufacturing width:	2360 mm		
Surface:	smooth	Available on request			



CHARACTERISTICS ¹	
antistatic	Fat- and Oilresistant
adhesiv	✓ rigid weft
high adhesiv	head resistant
antibacterial	✓ cold resistant
✓ Food quality / FDA regulation	✓ excellent resistance to abrasion
silent runnings	able for Knife edge
able to mounting	✓ excellent resistance to cuts
conductive	accumulationable

Type of support:	➡ sliding	✓
	➡ rolling	✓

Splice:	➡ Finger joint ➡ Welded by hot air gun ➡ Fasteners
----------------	--

Accessories:	➡ on request
---------------------	--------------

Use:	➡ slaughterhouses ➡ belts for packages ➡ Presses ➡ Metal-industry
-------------	--

¹ only with a mark is true. Transtec should not be held responsible when the data sheet used is not valid anymore.